

CUTLASS SERIES

THE MOST FUNCTIONAL AND AFFORDABLE PRESS IN ITS CLASS




Workhorse delivers the ultimate in hardworking style. The Cutlass offers practical, easy to use pneumatic printheads and features a powerful, efficient and precise electric indexing system. Powered by the industry leading Workhorse OS, all of the options you need to take control are right at your fingertips.

**WORKHORSE
PRODUCTS**

Durable & Dependable Screen Printing Machinery




KEY FEATURES




CENTRAL OFF CONTACT

Operators have the ability to quickly change between different substrates with the fast and easy central off contact feature.




FOOT PEDAL CONTROL

Foot pedal control comes standard on every press. This allows the press operator to index the machine or use the pedal as a skip shirt feature to avoid printing on empty pallets or misaligned shirts.



ON-HEAD PRINT CONTROLS

Independent print and flood speed with front and rear pneumatic screen clamp switches. Table up/down, index and print buttons.



FRONT & REAR MICRO REGISTRATION

Independent print and flood speed with front and rear pneumatic screen clamp switches. Table up/down, index and print buttons.



CHOPPER SYSTEM


Advanced chopper system improves stroke length to increase image area. Default up-state keeps squeegee & floodbar up off of screen and facilitates easy set-up and tear-down by allowing more screen clearance.



FLASHBACK COMPATIBLE


The patented FlashBack is the only system on the market that allows you to print, flash and cool all at one station. This means a six color printer can truly print six colors.

WORKHORSE OS TOUCHSCREEN INTERFACE

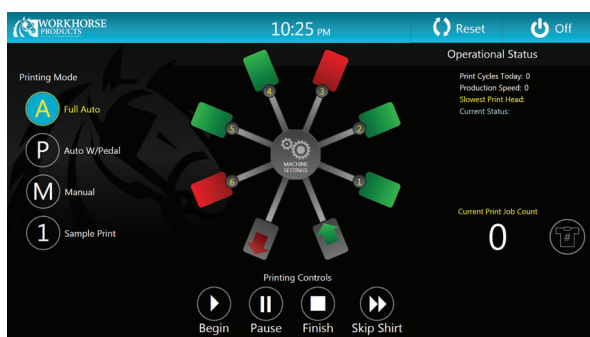


- Pivoting control panel with touch-screen display
- Real-time production data
- Onboard self-diagnostics
- Multiple (1-9) print stroke capability
- Multi-print in the up position
- Countdown program indicates when operator set index count has been reached
- Independent print-start/print-finish setting automatically activates and stops printheads at the beginning and end of production runs

CUTLASS 6/8



CUTLASS 8/10



Part Number	CE-68-PC	CE-810-PC
Colors/Stations	6 Colors/8 Stations	8 Colors/10 Stations
Standard Print Area	20" x 20" (50.8 cm x 50.8 cm)	20" x 20" (50.8 cm x 50.8 cm)
Production Capacity	600-700 (50-60 doz.)/hr.	600-700 (50-60 doz.)/hr.
Power Requirements	ELECTRIC 1 Phase 220V, 5 amps	ELECTRIC 1 Phase 220V, 6 amps
	AIR	AIR
	110psi (7.6 bar), 22cfm (623 L/M)	110psi (7.6 bar), 24cfm (680 L/M)
Diameter	12'-6" (3.8 m)	14' (4.27 m)