

POWERHOUSE

SERIES II DRYER

NOT JUST FOR PLASTISOL ANYMORE



PD-3009-4


The Powerhouse Series II cures plastisol and water-based ink at industrial rated production speeds. The control center is managed via a touch screen tablet that is easy to use while providing you much more information than ever before. A ground up redesign of the air handling system now offers a powerful yet controllable air flow that is easily matched to your ink system.

**WORKHORSE
PRODUCTS**

Durable & Dependable Screen Printing Machinery




KEY FEATURES




INFRARED PANEL HEATING ELEMENTS

Powered by electricity the heating chamber is capable of curing any ink.



ADJUSTABLE EXHAUST

Easily adjust air circulation and exhaust settings for multiple curing needs.

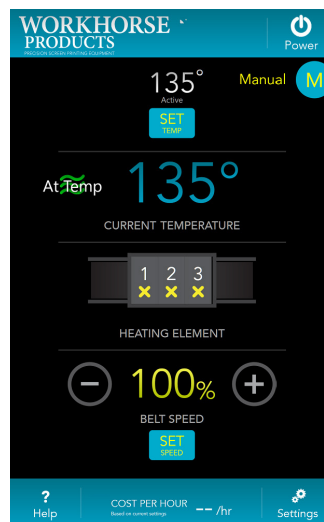

TOUCH SCREEN CONTROL PANEL

- Tablet Control with Workhorse OS
- Digital temperature read out
- Gradual warm up
- Maintains even temperatures
- Actual belt speed indicator
- Power consumption
- Auto cool down mode during shut down
- Track temperature, belt speed and power cost of individual jobs from Workhorse Portal

- Advanced airflow and air handling
- Touch screen tablet control center
- Infrared radiant panel heating elements
- Conveyor belt system



PD-5409-4

CONV DRYER 30-09 3PNL



CONV DRYER 30-09 4PNL



CONV DRYER 54-09 3PH, 3PNL



CONV DRYER 54-09 3PH, 4PNL



| Part Number | PD-3009-3-1P(3P) | PD-3009-4-1P(3P) | PD-5409-3-3P | PD-5409-4-3P |
|-----------------------|--|--|--|--|
| Belt Size | 30" x 9' (76cm x 275cm) | 30" x 9' (76cm x 275cm) | 54" x 9' (137cm x 275cm) | 54" x 9' (137cm x 275cm) |
| Production Capacity | 400-500/HR – plastisol 100-200/HR – waterbased | 450-550/HR – plastisol 200+/HR – waterbased | 900+/HR – plastisol 300-400/HR – waterbased | 950+/HR – plastisol 400+/HR – waterbased |
| Power Requirements | ELECTRIC 1-Phase: 240V, 50-60Hz, 11,309W, 47A OPTIONAL 3-Phase, 240V, 50-60Hz, 11,417W, 31A | ELECTRIC 1-Phase: 240V, 50-60Hz, 14,909W, 62A OPTIONAL 3-Phase, 240V, 50-60Hz, 15,017W, 40A | ELECTRIC 3-Phase: 240V, 50-60Hz, 22,217W, 58A | ELECTRIC 3-Phase: 240V, 50-60Hz, 22,217W, 76A |
| Infeed/Exit x Chamber | 26" x 54" (66cm x 137cm) | 26" x 54" (66cm x 137cm) | 26" x 54" (66cm x 137cm) | 26" x 54" (66cm x 137cm) |